



## Accurately Record Farm Visits

For vehicles that aren't equipped with GPS, use Farm Health Guardian GPS devices to automatically record visits and vehicle movement on and off farm properties.

### TrackLight – Round

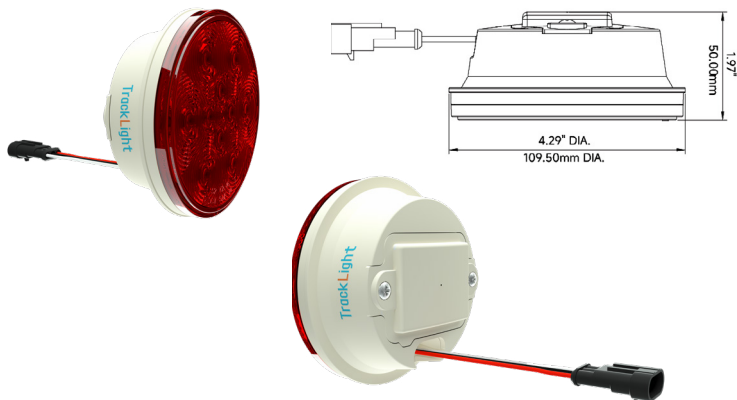

### TrackLight – Oval

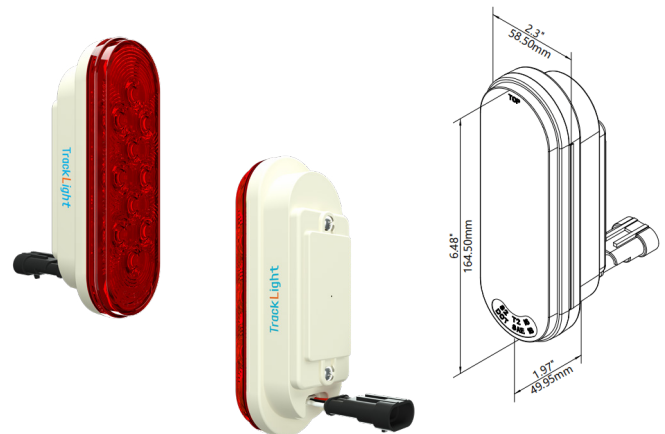

### TrackLight – Round or Oval: Truck or Trailer Taillight


#### FEATURES

- 4G connectivity, with 3G fallback
- Completely covert; looks and functions the same as a normal LED taillight
- Easy installation using a standard hardshell plug, no extra wiring required
- IP67 rating (weatherproof and water resistant up to 1 m submerged)
- Out-of-the-box deployment
- Battery back-up provides up to 90 days of location reporting

#### DATA TRANSMISSION

- Real-time tracking with breadcrumb trails
- Default update interval: every 5 minutes when powered; every 15 minutes when unpowered and moving
- Optional update interval: every 1 minute when powered; every 15 minutes when unpowered and moving

## TrackLight – Square Combo Light

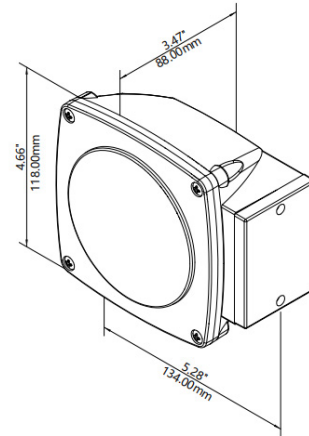

## TrackLight – Square Combo Light: Trailer Taillight

### FEATURES

- 4G connectivity with 3G fallback
- Completely covert; looks and functions the same as a normal LED stop/turn/tail trailer light
- Easy installation; no cutting, drilling or splicing required
- IP67 (weatherproof and water resistant up to 1 m submerged)
- Out-of-the-box deployment
- Battery back-up provides up to 90 days of location reporting

### DATA TRANSMISSION

- Real-time tracking with breadcrumb trails
- Default update interval: every 5 minutes when powered; every 15 minutes when unpowered and moving
- Optional update interval: every 1 minute when powered; every 15 minutes when unpowered and moving

## Cable Adaptors for TrackLights

Standard 3-Pin Hard Shell  
connector to 3PL female plug



Standard 3-Pin Hard Shell  
connector to Grote 3 wire  
90-degree male plug



Standard 3-Pin Hard Shell  
connector for custom  
connection to vehicle wiring



### SPECIFICATIONS

- Wire Material: GPT
- Wire Gauge: 3-16 GA
- Connection Type:  
3-Way Hard Shell
- Length: 10"
- # of Wires: 3

## OBD Tracker



**Size:**

- 65 mm x 53 mm x 26 mm
- 2.6" x 2.1" x 1"

## OBD Passenger Vehicle Tracker

### FEATURES

- 4G GPS tracker; wider coverage than 3G models
- Plugs into your vehicle's OBDII diagnostic port under the dash
- Out-of-the-box deployment
- Compact size
- Suitable for most passenger vehicles built after 1996
- In-vehicle placement for security

### DATA TRANSMISSION

- Real-time tracking with breadcrumb trail
- Default update interval: every minute when moving
- Optional update interval: every 5 minutes when moving

## Radar



### Size:

- 292 mm x 93 mm x 42 mm
- 11.49" x 3.66" x 1.65"

## Radar H2 by BlackBerry Trailer and Heavy Equipment Monitoring

### FEATURES

- 4G LTE-M, with 3G fallback
- IP Rating:
  - IP67 (weatherproof and water resistant up to 1 m submerged)
  - SAE J1455 water spray rated (for heavy-duty vehicle applications)
- Out-of-the-box deployment
- Motion tracking, triggering updates
- Premium battery that lasts 3 years

### DATA TRANSMISSION

- Update interval: every 15 minutes when moving, and every 24 hours when stopped